


**LEGEND**

- 1. Electronic control
- 2. Control panel lock
- 3. Emergency stop button
- 4. Door
- 5. -
- 6. -
- 7. Main switch
- 8. Main power supply
- 9. Air outlet
- 10. Suction
- 11. Exhaust duct
- 12. Earthing connection
- 13. Lint screen cover

Type	A [mm]	B [mm]	C [mm]
T 11	762	990	1070
T 13	852	1080	1160
T 16	972	1200	1280

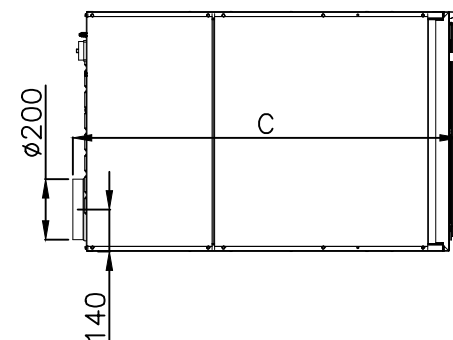

**EXHAUST SYSTEM:**

The dryer produces hot humid air (maximum temp. 70°C) and combustible lint. To reduce a risk of fire the dryer must be exhausted to the outdoors by means of exhaust duct connected to exhaust piping. The design of the flue system shall be such that any condensate formed when operating the appliance from cold shall either be retained and subsequently re-evaporated or discharged.

If possible, do not install dryers and gas fired hot water heaters or the other gravity vented appliances in the same room.

Use exhaust ducts made of sheet metal or other noncombustible material.

The dryer requires an action related to air which replaced the air exhausted from the dryer. Opening(s) for air supply from outside of the building should be as close to the dryer(s) as possible. Aerating opening(s) for the make-up air supply required per each individual dryer is 0.07÷0.11 m<sup>2</sup>.

	T 11	T 13	T 16
<b>MACHINE DIMENSIONS</b>			
Width – maximum	795 mm	795 mm	795 mm
Depth	1070 mm	1160 mm	1280 mm
Height – maximum	1700 mm	1700 mm	1700 mm
Cylinder – diameter	760 mm	760 mm	760 mm
– depth	540 mm	630 mm	750 mm
– capacity	250 l	285 l	345 l
Net weight	225 kg	250 kg	240 kg
Air outlet	ø200 mm	ø200 mm	ø200 mm
<b>ELECTRICAL DATA</b>			
Heating elements	13.5 kW	18 kW	24 kW
Drive with reverse power	0.25 kW	0.25 kW	0.25 kW
Fan power (reversing model)	0.55 kW	0.55 kW	0.55 kW
Non reversing drive power	0.55 kW	0.55 kW	0.55 kW
Voltage system	3x380–415/208–240V/480V–50/60Hz / 3x440V 60Hz		
Total power supply	14.2 kW	18.7 kW	24.7 kW
Fuse	25/50/32/32A	32/63/32/40A	40/80/40/40A
Conductor section [mm <sup>2</sup> Cu]	4x4/4x10/4x6/4x6	4x6/4x16/4x6/4x6	4x6/4x16/4x6/4x6

Type	Optimum air flow [m <sup>3</sup> /hr]	Max. static back pressure at pipeline [Pa]
T 11	520 $\oplus$	220
T 13	550	240
T 16	600	260

primus

T11E  
T13E  
T16E

Date:	11/2005	No.	06–110–2.1
Author:	RJ	Index/date	E/11.2010
TUMBLE DRYER ELECTRICAL HEATING			